


Acoustic Foam

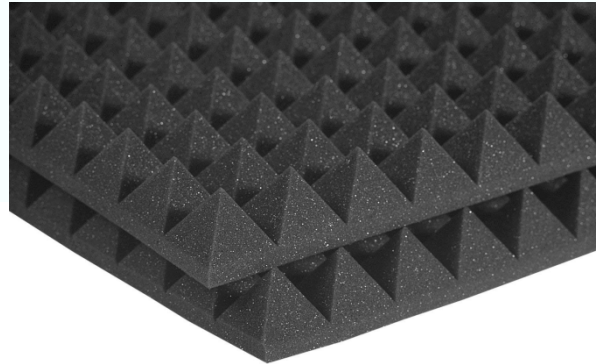

Product code	Density Kg/m ³	Color	Hardness 50% [N]	Resilience	Applicable Standard	Application
018WHCG	18+/-1	White	170+/-20	30% min	IS7888	Thermal insulation in Fridge
026GYRG	26+/-1	Grey	230+/-30	35% min	IS7888	Sound Insulation
026GYFR	26+/-1	Grey	130+/-30	35% min	IS7888	Sound dampening in DG
028GYFR	26+/-1	Grey	130+/-30	35% min	IS7888 ASTM C423 ISO 354 NRC Level@ 0.65 in 50mm	Sound dampening in DG