


UV foam

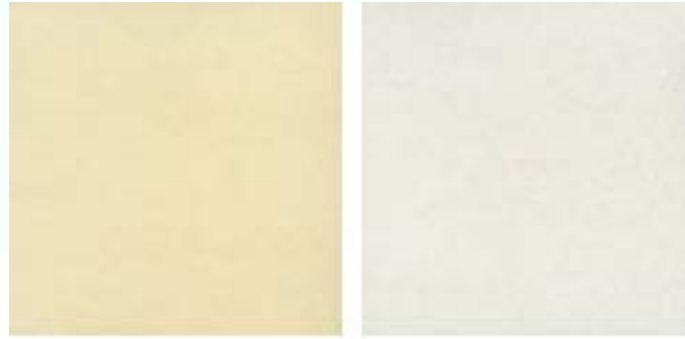

UV UN TREATED

UV TREATED

Product code	Density Kg/m ³	Color	Hardness 50% [N]	Resilience	Applicable Standard	Application
050LGUV	50+/-2	Light bone Grey	>500	30% min	IS-7888 Sun test level 4~5 @ Standard FT-11	Used in shoe upper,
030LGUV	30+/-2	Light bone Grey	150+/-20	40% min		Used in Bra cups, shoe upper